


## R-Telecom 50 $\Omega$ , Coaxial Cable Assembly, Connector N(m) - N(m), 100cm

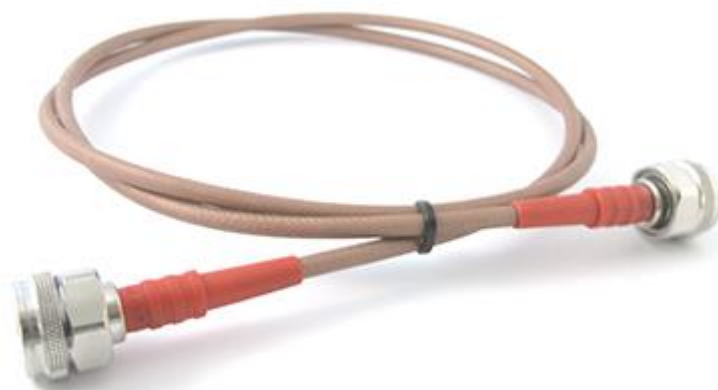

Technical Data Sheet	
Characteristic Impedance, $\Omega$	50 ( $\pm 2$ )
Capacitance, pF/cm	0,965
Velocity of Propagation, %	69.2
Maximum Operating Frequency, GHz	4,8
Bend radius, mm	25
Maximum operating voltage, V	1900
Work temperature, $^{\circ}\text{C}$	-55 ~200
Length, cm (end to end with connectors)	100 ( $\pm 0,5$ )
Cable attenuation (Typ.)	
Frequency, MHz	Attenuation, dB
100	0,154
400	0,297
800	0,436
1200	0,544
2400	0,801
4800	1,184